

# Shunt Series

## Shunt-1000A

DC Current Shunt Datasheet



Accuenergy DC current shunts are engineered for precision measurement in DC current systems. Designed to connect to a DC power meter to measure electrical currents based on a small voltage drop, DC current shunts provide accurate energy measurements in a variety of applications including renewable energy, mass transit, battery charging, electric vehicles, welding, heavy industrial environments, and OEM applications.

### Features

- Accuracy class: 0.2%
- 75mV voltage drop



### Accuenergy Inc.

Los Angeles - Toronto - Pretoria  
 North America Toll Free: 1-877-721-8908  
 Web: [www.accuenergy.com](http://www.accuenergy.com)  
 Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)

Revision Date: March 2024 Version: 1.0.3  
 Specs Subject To Change Without Notice.



### Specifications

<b>RATED CURRENT</b>	1000A
Current Range	10-120% of rated current
Accuracy	0.2%
Voltage Drop	75mV

### MECHANICAL/ENVIRONMENTAL

Form Factor	Inline installation
Exterior Dimensions	125.0mm x 70.0mm x 21.0mm 4.92" x 2.76" x 0.83"
Case Material	Manganin Alloy
Operating Temperature	-40°C to 80°C / -40°F to 176°F
Shunt Temperature w/ Load Current	<80% of rated current = 80°C (176°F), >120% = of rated current = 120°C (248°F)
Storage Temperature	-55°C to 85°C / -67°F to 185°F
Operating Humidity	Non-condensing, 0 to 95% RH
Installation Conditions	Indoor Use


### ELECTRICAL

Frequency Range	DC
-----------------	----

### SAFETY/COMPLIANCE

Overload	120% of nominal current (2 hours)
Certifications	RoHS

### Dimensions

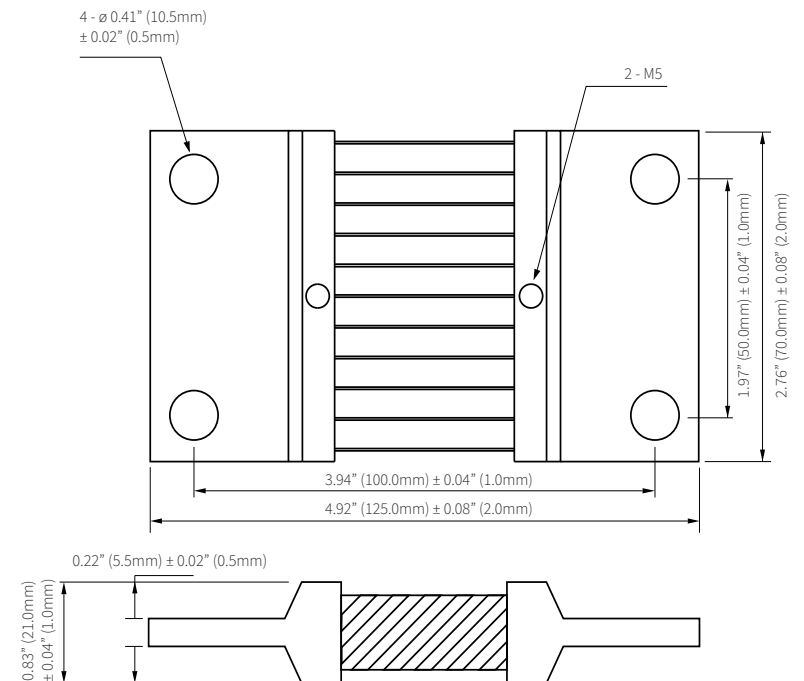

### Ordering Information

		Rated Input	Voltage Drop
<b>Ordering Number</b>	Shunt	-	/
<b>Ordering Example</b>	<b>Shunt</b>	<b>- 1000A</b>	<b>/ 75mV</b>
		1000A	75mV