

**ACCUEENERGY**

# AcuPRE™ Series

Differential Pressure Sensors



D A T A S H E E T

# AcuPRE™ WM Series

Wall Mount Differential Pressure Sensor  
Datasheet



Designed for accurate pressure measurement in localized spaces, the AcuPRE WM series differential pressure sensor is suitable for wall mount installations with minimum surface exposure. It employs a high-accuracy MEMS sensor to measure positive, negative, and differential pressure (DP) to monitor airflow, building or room pressure, or indicate when filters need to be replaced. The DP sensor features configurable settings, including zero calibration, pressure range, response time, and unit of measurement. The AcuPRE WM sensor includes a 4-digit LCD that aids in troubleshooting and installation.

## Features


- ±1.0% full range accuracy ensuring precise measurements.
- Designed for wall/surface mount applications.
- Field selectable ranges as low as 0 to 0.1 inWC up to 0 to 40 inWC based on model number selection.
- Unidirectional or bidirectional measurements.
- 0.5/1/2/5s user selectable response time.
- User selectable units of measurement with DIP switches allowing quick unit conversion.
- All models come with 4-digit LCD display.
- IP 65 rated water-resistant & UL94V-0 fire retardant enclosure.
- Easy zero calibration to remove offset errors.



## Specifications

ELECTRICAL	
Voltage Power	16~28VAC/ 16~35VDC
Current Power	18.5~35VDC (RL=500Ω), 8.5~35VDC (RL=0Ω)
Output (Based on Select Models)	0~5VDC, 0~10VDC, 4~20mA (2 Wires)
Output Load	≤500Ω (Current), ≥2kΩ (Voltage)
ENVIRONMENTAL	
Medium	Non-Combustible, Non-Corrosive Air
Medium Temperature Range	0 to 60°C (32 to 140°F)
Operating Temperature Range	-20 to 70°C (-4 to 158°F)
Temperature Compensation	0 to 50°C (32 to 122°F)
Working Pressure	Overload 10xFS, Burst 15xFS
MECHANICAL	
Mounting	2-Screw Surface Mount with Hinged Cover
Connection	5mm ID Tubing (0.19") High/Low Pressure Ports
Weight	165g (0.36 lbs)
Display	4-Digit LCD, Size 65x18mm (2.56"x0.70") with Unit Indication
PERFORMANCE	
Accuracy	±1.0% FS (±2.0% FS@0.10 inWC Range)
Stability	±0.5% FS/Year
Thermal Effect	<0.08% FS/°C (FS) (+/- 0.045% FS/°F)
Response Time	0.5/1/2/5s, Can be Set by DIP Switches
CERTIFICATIONS/WARRANTY	
Enclosure Material	ABS+PC (Housing) & PC (Cover), Fire Retardant UL94V-0
Protection	IP65
Agency Approvals	CE
Warranty	5 Years

## Dimensions

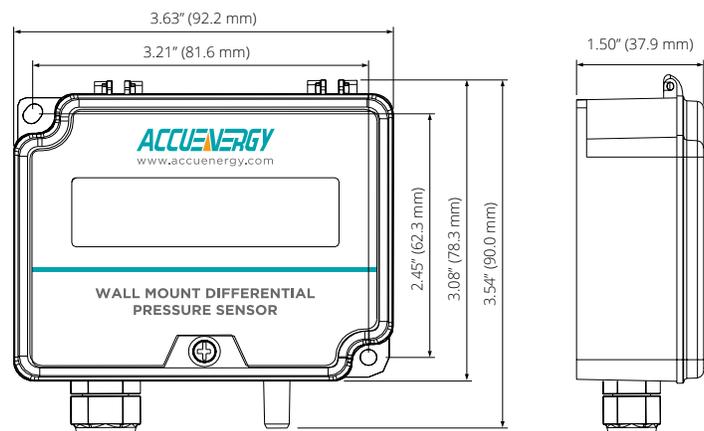

## ACCESSORIES

### Pressure Tip

Designed to be compatible with AcuPRE DP sensors, these pressure tips are available in straight or L-type, 0° or 60° angle openings, stainless steel or ABS. Supported in both static and total pressure, ensuring reliable pressure measurements in demanding environments.



### Clear PVC Tubing

Accuenergy offers clear PVC tubing designed for all AcuPRE differential pressure sensors. Available in 6.5' (2m) and 330' (100m) options, suitable for various installation conditions.



### Pressure Pickup Port

A pickup port is an inlet connected to a DP sensor, allowing the sensor to sample air pressure while preventing large particles from entering the pressure ports and damaging the sensor. Accuenergy offers both room pressure pickup ports and wall plate stainless steel pickup ports.



## Range Selection Chart

+ Range Code	Unit, Range, and Display Resolution				
	inWC	Pascals	kPa	mmWC	mbar
1	0.1	25	0.025	2.5	0.25
	0.25	60	0.06	6	0.6
	0.5	125	0.125	12	1.25
2	1	250	0.25	25	2.5
	2	500	0.5	50	5
	4	1000	1	100	10
3	10	2500	2.5	250	25
	20	5000	5	500	50
	40	10000	10	1000	100

## Ordering Information

+ Model	- Range (inWC) <i>See Range Selection Chart for Field Selectable Options</i>	- Display	- Output	+ Accessories (Optional)
AcuPRE-WM	01: 0-0.1", 0.25", 0.5" Unidirectional	A: With Display	1: 4 to 20mA	AcuPRE-XX-001 Clear PVC Tubing 0.19"(5mm) ID x 0.27"(7mm) OD x 6.5' (2m) Length.
	02: 0-1.0", 2.0", 4.0" Unidirectional		2: 0 to 5 VDC	AcuPRE-XX-002 Clear PVC Tubing 0.19"(5mm) ID x 0.27"(7mm) OD x 330' (100m) Length.
	03: 0-10", 20", 40" Unidirectional		3: 0 to 10 VDC	AcuPRE-XX-003 Static pressure tip, straight type, ABS, 0° angle opening.
	04: -0.125" to +0.125", -0.25" to +0.25" Bidirectional			AcuPRE-XX-004 Total pressure tip, straight type, ABS, 60° angle opening.
	05: -0.50" to +0.50", -1.0" to +1.0", -2.0" to +2.0" Bidirectional			AcuPRE-XX-005 Static pressure tip, straight type, 304SS, 0° angle opening, 125mm (4.92").
				AcuPRE-XX-006 Static pressure tip, straight type, 304SS, 0° angle opening, 200mm (7.87").
				AcuPRE-XX-007 Static pressure tip, L shape type, 304SS, 0° angle opening, 125mm (4.92").
				AcuPRE-XX-008 Static pressure tip, L shape type, 304SS, 0° angle opening, 200mm (7.87").
				AcuPRE-XX-009 Room pressure pickup port.
				AcuPRE-XX-010 Wall plate stainless steel pickup port.

Ordering Example: AcuPRE-WM-04-A-3



### Accuenergy Inc.

Los Angeles - Toronto - Pretoria  
 North America Toll Free: 1-877-721-8908  
 Web: [www.accuenergy.com](http://www.accuenergy.com)  
 Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)

Revision Date: November 2025 Version: 1.0.1  
 Specs Subject To Change Without Notice.

# AcuPRE™ DM Series

Duct Mount Differential Pressure Sensor  
Datasheet



The AcuPRE DM series differential pressure sensor utilizes high-accuracy MEMS sensor and digital technology to measure positive, negative, or differential pressure. Designed for duct-mounted HVAC applications, it includes a static pressure probe for monitoring fans, blowers, and duct static pressure. The sensor offers user-selectable settings such as zero calibration, pressure range, response time, and unit of measurement. The AcuPRE DM comes standard with an LCD module that supports 180° reverse installation for flexible wiring and application.

## Features


- ±1.0% full range accuracy ensuring precise measurements.
- Designed for duct mount applications.
- Field selectable ranges as low as 0 to 0.1 inWC up to 0 to 40 inWC based on model number selection.
- Unidirectional or bidirectional measurements.
- 0.5/1/2/5s user selectable response time.
- User selectable units with DIP switches allowing quick unit conversion.
- All models come with five-digit LCD module that supports 180° reverse installation.
- IP 65 rated water-resistant & UL94V-0 fire retardant enclosure.
- Easy zero calibration.



## Specifications

ELECTRICAL	
Voltage Power	16~28VAC/ 16~35VDC
Current Power	18.5~35VDC (RL=500Ω); 8.5~35VDC (RL=0Ω)
Output (Based on Select Models)	0~5VDC, 0~10VDC, 4~20mA (2 Wires)
Output Load	≤500Ω (Current), ≥2kΩ (Voltage)
ENVIRONMENTAL	
Medium	Non-Combustible, Non-Corrosive Air
Medium Temperature Range	0 to 60°C (32 to 140°F)
Operating Temperature Range	-20 to 70°C (-4 to 158°F)
Temperature Compensation	0 to 50°C (32 to 122°F)
Working Pressure	Overload 10xFS, Burst 15xFS
MECHANICAL	
Mounting	2-Screw with Back Mount Pressure Probe, Duct Mount
Connection	5mm ID Tubing (0.19")
Weight	200g (0.44 lbs)
Display	5-Digit LCD, Size 44x18mm (1.73" x 0.70"), with Unit Indication
PERFORMANCE	
Accuracy	±1.0% FS (±2.0% FS@ 0.10 inWC Range)
Stability	±0.5% FS/Year
Thermal Effect	<0.08% FS/°C (FS) (+/- 0.045% FS/°F)
Response Time	0.5/1/2/5s. Can be Set by DIP Switches
CERTIFICATIONS/WARRANTY	
Enclosure Material	ABS+PC (Housing) & PC (Cover), Fire Retardant UL94V-0
Protection	IP65
Agency Approvals	CE
Warranty	5 Years

## Dimensions

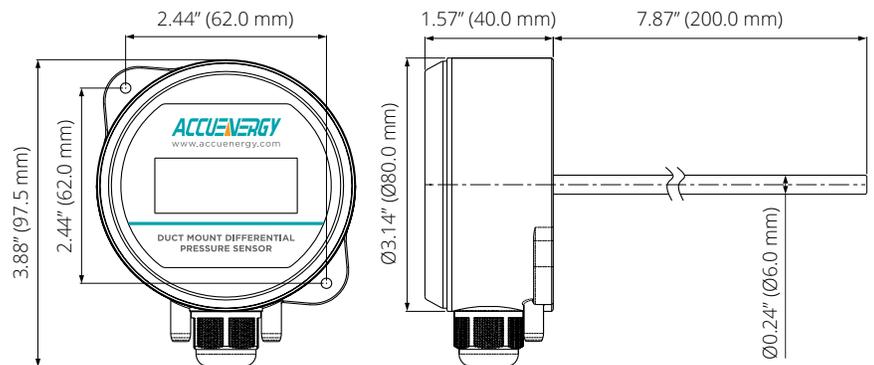

## ACCESSORIES

### Pressure Tip

Designed to be compatible with AcuPRE DP sensors, these pressure tips are available in straight or L-type, 0° or 60° angle openings, stainless steel or ABS. Supported in both static and total pressure, ensuring reliable pressure measurements in demanding environments.



### Clear PVC Tubing

Accuenergy offers clear PVC tubing designed for all AcuPRE differential pressure sensors. Available in 6.5' (2m) and 330' (100m) options, suitable for various installation conditions.



### Pressure Pickup Port

A pickup port is an inlet connected to a DP sensor, allowing the sensor to sample air pressure while preventing large particles from entering the pressure ports and damaging the sensor. Accuenergy offers both room pressure pickup ports and wall plate stainless steel pickup ports.



## Range Selection Chart

+ Range Code	Unit, Range, and Display Resolution				
	inWC	Pascals	kPa	mmWC	mbar
1	0.1	25	0.025	2.5	0.25
	0.25	60	0.06	6	0.6
	0.5	125	0.125	12	1.25
2	1	250	0.25	25	2.5
	2	500	0.5	50	5
	4	1000	1	100	10
3	10	2500	2.5	250	25
	20	5000	5	500	50
	40	10000	10	1000	100

## Ordering Information

+ Model	- Range (inWC) <i>See Range Selection Chart for Field Selectable Options</i>	- Display	- Output	+ Accessories (Optional)
AcuPRE-DM	01: 0-0.1", 0.25", 0.5" Unidirectional	A: With Display	1: 4 to 20mA	AcuPRE-XX-001 Clear PVC Tubing 0.19"(5mm) ID x 0.27"(7mm) OD x 6.5' (2m) Length.
	02: 0-1.0", 2.0", 4.0" Unidirectional		2: 0 to 5 VDC	AcuPRE-XX-002 Clear PVC Tubing 0.19"(5mm) ID x 0.27"(7mm) OD x 330' (100m) Length.
	03: 0-10", 20", 40" Unidirectional		3: 0 to 10 VDC	AcuPRE-XX-003 Static pressure tip, straight type, ABS, 0° angle opening.
	04: -0.125" to +0.125", -0.25" to +0.25" Bidirectional			AcuPRE-XX-004 Total pressure tip, straight type, ABS, 60° angle opening.
	05: -0.50" to +0.50", -1.0" to +1.0", -2.0" to +2.0" Bidirectional			AcuPRE-XX-005 Static pressure tip, straight type, 304SS, 0° angle opening, 125mm (4.92").
	<b>Ordering Example: AcuPRE-DM-04-A-3</b>			AcuPRE-XX-006 Static pressure tip, straight type, 304SS, 0° angle opening, 200mm (7.87").
				AcuPRE-XX-007 Static pressure tip, L shape type, 304SS, 0° angle opening, 125mm (4.92").
				AcuPRE-XX-008 Static pressure tip, L shape type, 304SS, 0° angle opening, 200mm (7.87").
				AcuPRE-XX-009 Room pressure pickup port.
				AcuPRE-XX-010 Wall plate stainless steel pickup port.



### Accuenergy Inc.

Los Angeles - Toronto - Pretoria  
 North America Toll Free: 1-877-721-8908  
 Web: [www.accuenergy.com](http://www.accuenergy.com)  
 Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)

Revision Date: November 2025 Version: 1.0.1  
 Specs Subject To Change Without Notice.

# AcuPRE™ PM Series

Panel Mount Differential Pressure Sensor  
Datasheet



With a compact design and DIN rail mount support, the AcuPRE PM series is an ideal fit for panel builds used in OEM applications. It utilizes advanced MEMS technology and digital processing for  $\pm 1.0\%$  full scale accuracy to deliver the most reliable real-time pressure data. Includes user-configurable response time and easy zero calibration, enabling the ultimate flexibility to meet diverse monitoring needs. Its slim form factor and various output options make it a versatile solution for easy installation in panel builds that require precise pressure control.

## Features


- $\pm 1.0\%$  full range accuracy ensuring precise measurements.
- Compact DIN rail mount design for OEM applications.
- Wide selection of pressure ranges as low as 0 to 0.1 inWC up to 0 to 40 inWC based on model number selection.
- Unidirectional or bidirectional measurements.
- 0.5/1/2/5s user selectable response time.
- IP 30 rated water-resistant & UL94V-0 fire retardant enclosure.
- Easy zero calibration to eliminate offset errors.



## Specifications

ELECTRICAL	
Voltage Power	16~28VAC/ 16~35VDC
Current Power	18.5~35VDC (RL=500Ω), 8.5~35VDC (RL=0Ω)
Output (Based on Select Models)	0~10VDC, 4~20mA (2 Wires)
Output Load	$\leq 500\Omega$ (Current), $\geq 2k\Omega$ (Voltage)
ENVIRONMENTAL	
Medium	Non-Combustible, Non-Corrosive Air
Medium Temperature Range	0 to 60°C (32 to 140°F)
Operating Temperature Range	-20 to 70°C (-4 to 158°F)
Temperature Compensation	0 to 50°C (32 to 122°F)
Working Pressure	Overload 10xFS, Burst 15xFS
MECHANICAL	
Mounting	35mm DIN Rail
Connection	5mm ID Tubing (0.19") High/Low Pressure Ports
Weight	110g (0.24 lbs)
PERFORMANCE	
Accuracy	$\pm 1.0\%$ FS
Stability	$\pm 0.5\%$ FS/Year
Thermal Effect % FS/°C (Zero/FS)	$\pm 0.05/0.08$
Response Time	0.5/1/2/5s, Can be Set by DIP Switches
CERTIFICATIONS/WARRANTY	
Enclosure Material	Fire-Proof ABS+PC, Fire Retardant UL94V-0
Protection	IP30
Agency Approvals	CE
Warranty	5 Years

## Dimensions

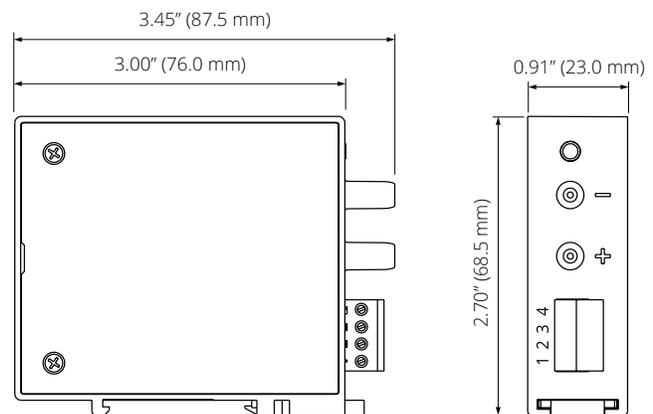

## ACCESSORIES

### Pressure Tip

Designed to be compatible with AcuPRE DP sensors, these pressure tips are available in straight or L-type, 0° or 60° angle openings, stainless steel or ABS. Supported in both static and total pressure, ensuring reliable pressure measurements in demanding environments.



### Clear PVC Tubing

Accuenergy offers clear PVC tubing designed for all AcuPRE differential pressure sensors. Available in 6.5' (2m) and 330' (100m) options, suitable for various installation conditions.



### Pressure Pickup Port

A pickup port is an inlet connected to a DP sensor, allowing the sensor to sample air pressure while preventing large particles from entering the pressure ports and damaging the sensor. Accuenergy offers both room pressure pickup ports and wall plate stainless steel pickup ports.



## Ordering Information

Model	Pressure Range	Accuracy	Output
AcuPRE-PM	01: 0 to 0.10" Unidirectional	B: ±1.0%FS	1: 4 to 20mA
	02: 0 to 0.25" Unidirectional		2: 0 to 10 VDC
	03: 0 to 0.50" Unidirectional		
	04: 0 to 1.00" Unidirectional		
	05: 0 to 2.00" Unidirectional		
	06: 0 to 4.00" Unidirectional		
	07: 0 to 10.00" Unidirectional		
	08: 0 to 20.00" Unidirectional		
	09: 0 to 40.00" Unidirectional		
	10: -0.125 to +0.125" Bidirectional		
	11: -0.25 to +0.25" Bidirectional		
	12: -0.50 to +0.50" Bidirectional		
	13: -1.0 to +1.0" Bidirectional		
	14: -2.0 to +2.0" Bidirectional		
	15: -5.0 to +5.0" Bidirectional		

Ordering Example: AcuPRE-PM-04-B-1

Accessories (Optional)	
AcuPRE-XX-001	Clear PVC Tubing 0.19"(5mm) ID x 0.27"(7mm) OD x 6.5' (2m) Length
AcuPRE-XX-002	Clear PVC Tubing 0.19"(5mm) ID x 0.27"(7mm) OD x 330' (100m) Length
AcuPRE-XX-003	Static pressure tip, straight type, ABS, 0° angle opening.
AcuPRE-XX-004	Total pressure tip, straight type, ABS, 60° angle opening.
AcuPRE-XX-005	Static pressure tip, straight type, 304SS, 0° angle opening, 125mm (4.92").
AcuPRE-XX-006	Static pressure tip, straight type, 304SS, 0° angle opening, 200mm (7.87").
AcuPRE-XX-007	Static pressure tip, L shape type, 304SS, 0° angle opening, 125mm (4.92").
AcuPRE-XX-008	Static pressure tip, L shape type, 304SS, 0° angle opening, 200mm (7.87").
AcuPRE-XX-009	Room pressure pickup port.
AcuPRE-XX-010	Wall plate stainless steel pickup port.



### Accuenergy Inc.

Los Angeles - Toronto - Pretoria  
 North America Toll Free: 1-877-721-8908  
 Web: [www.accuenergy.com](http://www.accuenergy.com)  
 Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)

Revision Date: November 2025 Version: 1.0.1  
 Specs Subject To Change Without Notice.