

# AcuSplitCT Series 100/200A Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The Split Core CTs are ideal for quick and easy installation without disconnecting cables during installation. The internal precision burden resistor across the secondary winding of the CT provides a safe low voltage output and permits safe opening of the secondary.

## FEATURES

- Clamp-on design, easy installations
- 333mV output, safe installations
- Most cost-effective

## SPECIFICATIONS

Rated Primary Current	100A, 200A
Rated Secondary Current	333mV
Linearity Accuracy	0.5% (at 10%-130%)
Leads	8'(2.5m), twisted pair, 22AWG
Insulation Voltage	600Vac, Category III
Frequency range	50/60Hz
Withstand Voltage	3,000Vac
Standard	IEC 60044-1
Certification	UR, CE approved & RoHS compliant
Construction	Epoxy encapsulated housing

## ORDERING INFORMATION


Ordering Number:	AcuCT - 075 -	Rated Input	:	333
Ordering Example:	AcuCT - 075 -	100	:	333
		100: 100A		
		200: 200A		



**Accuenergy Corp.**  
 Los Angeles-Toronto-Beijing  
 North America Toll Free: 1-877-721-8908  
 Web: [www.accuenergy.com](http://www.accuenergy.com)  
 Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)



## DIMENSIONS

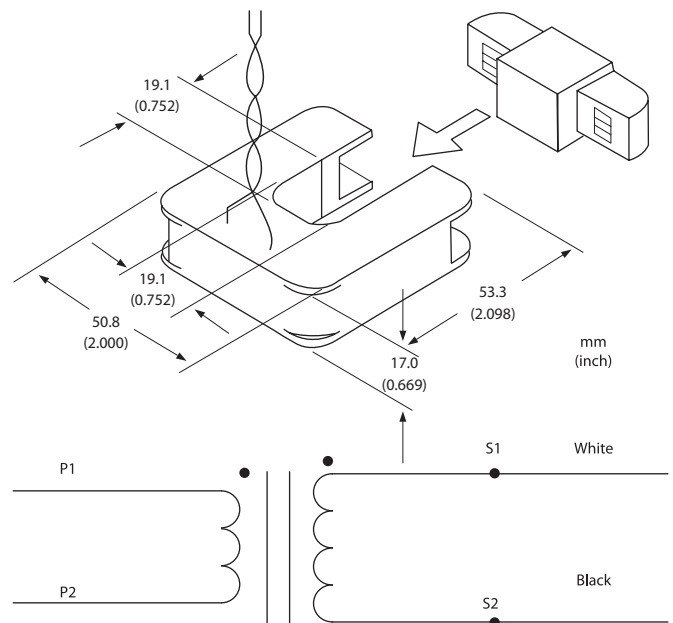

**ACCUEENERGY**  
 Your Power and Automation Partner