

# AcuSplitCT Series 1000/1200/1600A Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The CTs are ideal for quick and easy installation without disconnecting cables during installation. Multiple installation mechanisms provide stable and durable current measurement.

## FEATURES

- Most cost-effective
- Safe and easy installations
- Multiple installation mechanisms

## SPECIFICATIONS

Rated Primary Current	1000A, 1200A, 1600A
Rated Secondary Current	5A, 1A
Burden	7.5VA
Accuracy	0.5%
Withstand Voltage	3,000Vac
Frequency range	50-400Hz
Operating Temperature	-15°C - 60°C
Standard	IEC 60044-1
Case Material	UL flame retardant rating 94-V0
Certifications	UR, CE approved & RoHS compliant

## ORDERING INFORMATION


Ordering Number:	Rated Input		
AcuCT- 3147	-	-	-
Ordering Example: AcuCT- 3147	-	1600	- 5
	1000: 1000A	5: 5A	
	1200: 1200A	1:1A	
	1600: 1600A		



**Accuenergy Corp.**  
 Los Angeles-Toronto-Beijing  
 North America Toll Free: 1-877-721-8908  
 Web: [www.accuenergy.com](http://www.accuenergy.com)  
 Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)



## DIMENSIONS

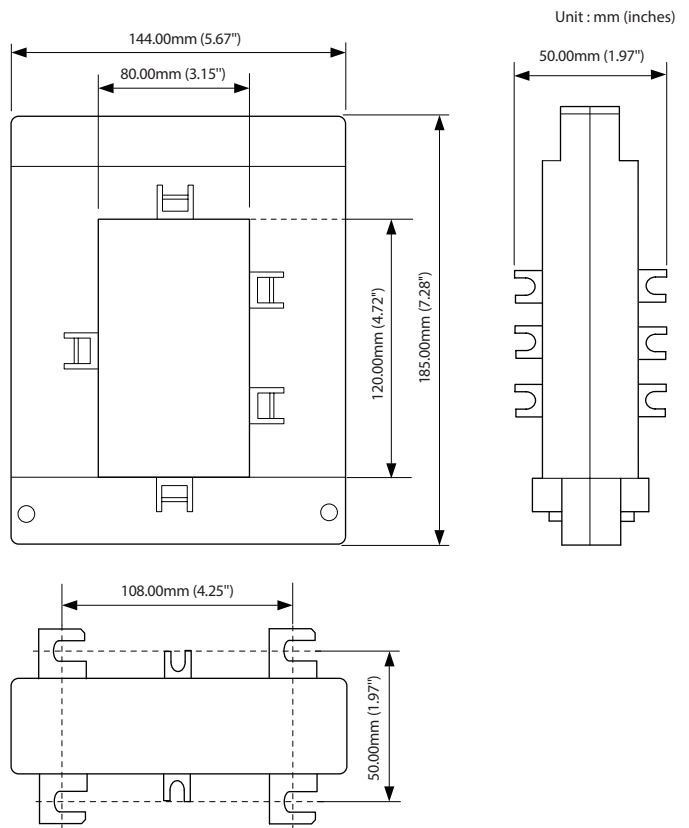

**ACCUEENERGY**  
 Your Power and Automation Partner